




| CLASSIFICATION | | CLASSIFICATION | |
|-------------------------|--------|-----------------------------------|--|
| EXTERNAL | LENGTH | 12192 ⁰ ₋₁₀ | 40' ⁰ _{-25/64"} |
| | WIDTH | 2438 ⁰ ₋₅ | 8' ⁰ _{-3/16"} |
| | HEIGHT | 2896 ⁰ ₋₅ | 9'-6" ⁰ _{-3/16"} |
| INTERNAL | LENGTH | 11908 ⁰ ₋₁₅ | 39' 13/16" ⁰ _{-19/32"} |
| | WIDTH | 1795 ⁰ ₋₁₀ | 5'-10 43/64" ⁰ _{-25/64"} |
| | HEIGHT | 2603 ⁰ ₋₁₀ | 8'-6 31/64" ⁰ _{-25/64"} |
| DOOR | WIDTH | 1737 ⁰ ₋₅ | 5'-8 25/64" ⁰ _{-3/16"} |
| OPENING | HEIGHT | 2537 ⁰ ₋₅ | 8'-3 7/8" ⁰ _{-3/16"} |
| CARGO ACCESS HEIGHT | | 2537 ⁰ ₋₅ | 8'-3 7/8" ⁰ _{-3/16"} |
| INTERNAL CUBIC CAPACITY | | 55.6 CU.M | 1963 CU.FT |

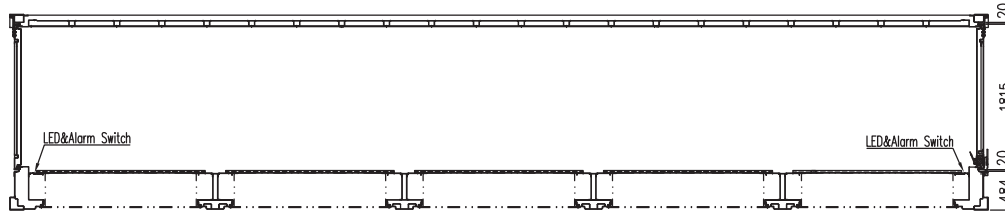


SECTION A-A

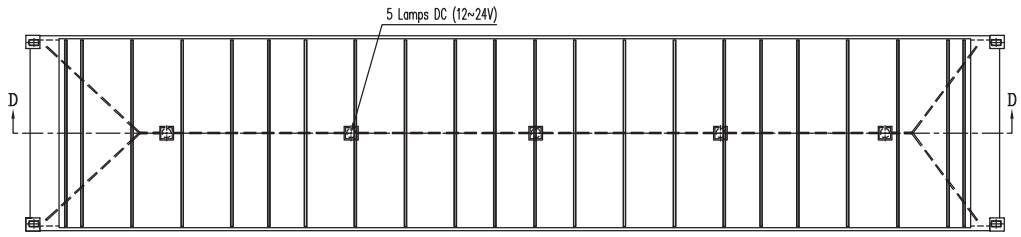


SECTION A-A

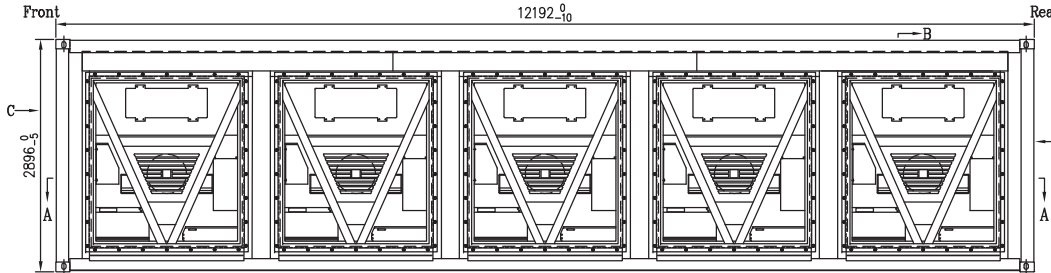

Left side


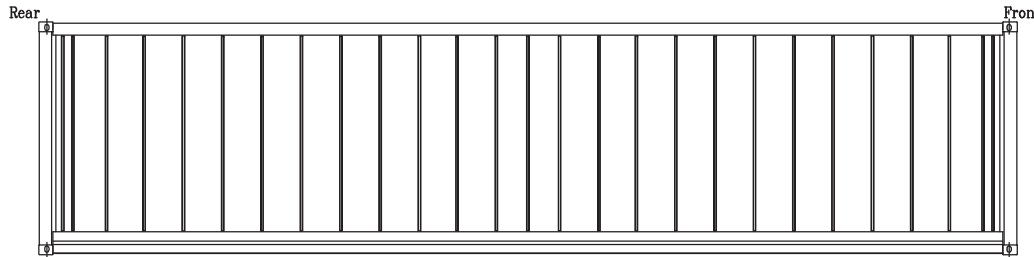


Right side

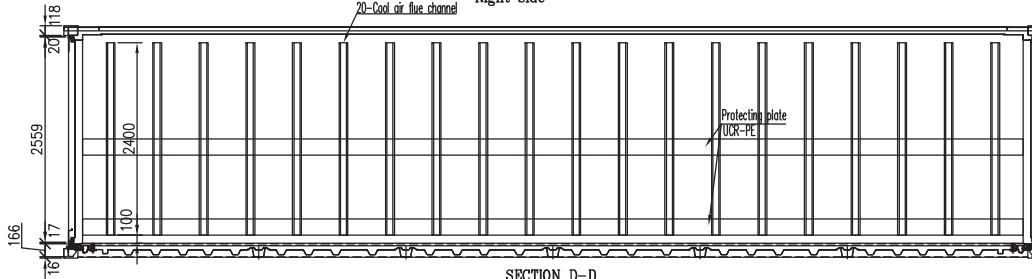

SECTION D-D

| | | | |
|------------------------------|---------------------------------------|------------|------------|
| MAX GROSS WEIGHT (INDICATED) | | 30,480 KGS | 67,200 LBS |
| TARE WEIGHT | EXCLUDING UNIT | 4,600 KGS | 10,140 LBS |
| (±2%) | INCLUDING UNIT (UNIT: 370KG*5=1850KG) | 6,450 KGS | 14,220 LBS |
| MAX PAYLOAD | | 24,030 KGS | 52,980 LBS |

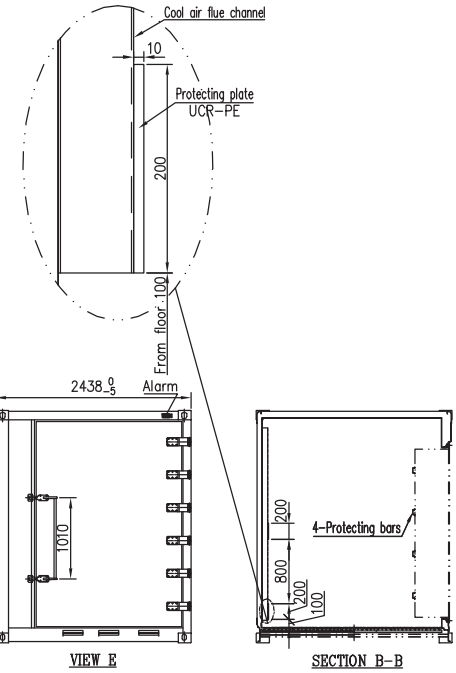

| TITLE: 40'x8'x9'6" REEFER GENERAL ARRANGEMENT | | | | | | | | | |
|---|-----|------|------------|-----------|---------------|------|---|--------|--|
| OWNED | | CIMC | | SCALE | 1 : 65 | QTY. | 1 | | |
| DESIGNED | TJH | DATE | 2019.09.29 | DWG. NO.: | S4H-05GD-000A | | | | |
| CHECKED | | DATE | | SHEET | 1 | OF | 1 | SHEETS | |
| APPROVED | | DATE | | | | | | | |

| ISSUE | DATA | DESIGNED | CHECKED | APPROVED |
|-------|------|----------|---------|----------|
| | | | | |